


## ABOVEGROUND PROPANE STORAGE TANKS

120 - 1000 Gallons

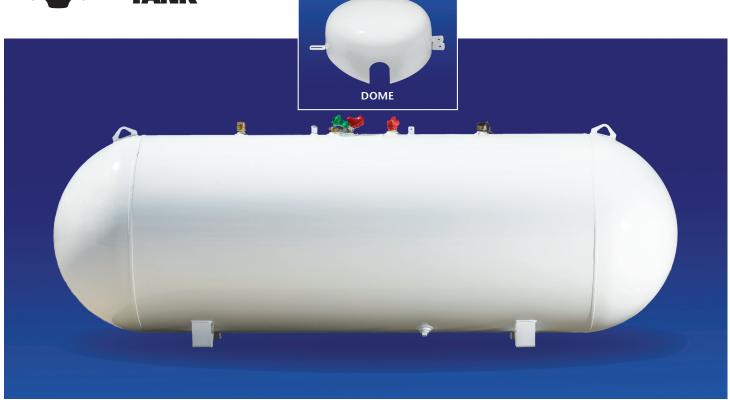

## PRESSURE VESSEL CODES & REGISTRATION

- Designed and constructed in accordance with the ASME Section VIII, Division 1 Code
- Registered with the National Board of Boiler & Pressure Vessels Inspectors
- Complies with NFPA 58
- Conforms to specifications set forth by the Railroad Commission of Texas

## **PAINT SPECIFICATIONS**

- Super durable TGIC polyester powder paint for maximum rust protection
- Standard tanks painted Sky White, custom colors available upon request

### **VESSEL FEATURES**

- Tanks fully fitted with RegO valves and Rochester liquid level gauges
- Container pressure rated at 250 PSI @ 400°F
- Vacuum purged
- Stainless steel data plate
- Steel domes (custom colors available upon request)
- #54 liquid level outage valve orifice

## **PROCESS CONTROL**

All welded products are x-rayed and pressure tested @ 325 PSI per ASME Sec VIII, Div 1 requirements, followed by rigorous leak test inspections, both pre and post valving

#### **STORAGE & DISTRIBUTION**

Contact Propane Education & Research Council for additional resources and information at **propane.com** 





# ABOVEGROUND PROPANE STORAGE TANKS

120 - 1000 Gallons

## **ABOVEGROUND VESSEL DIMENSIONS & SPECIFICATIONS**

(All Vessel Dimensions are Approximate)

Part Number	Description	<b>Water Capacity</b> Gal/l	Outside Diameter In/mm	Head Type	Overall Length In/mm	Overall Height In/mm	Leg Width In/mm	<b>Leg Spacing</b> In/mm	<b>Weight</b> Lbs/kg	<b>Qua</b> i Full Load	<b>ntity</b> Per Stack
68268**	120 Gallon Aboveground Storage Tank	120 454.2	24" 609.6	Ellip	5′ 8″ 1727.2	2′ 10 1/4″ 870	10 1/8" 257.2	3′ 0″ 914.4	310 140.6	96	12
68270**	250 Gallon Aboveground Storage Tank	250 946.3	30" 762	Hemi	7′ 10″ 2387.6	3′ 4 3/16″ 1020.8	12 3/4" 323.9	3′ 6″ 1066.8	471 213.6	54	9
68272**	320 Gallon Aboveground Storage Tank	320 1211.3	30" 762.0	Hemi	9′ 7″ 2921	3′ 4 3/16″ 1020.8	12 3/4" 323.9	4′ 0 1/4″ 1225.6	566 256.7	45	9
68303.20*	500 Gallon Aboveground Storage Tank	500 1892.7	41" 1041.4	Hemi	8′ 8 1/2″ 2654.3	4' 2 15/16 ' 1293.8	16 1/4" 412.8	3' 6" 1066.8	980 444.5	30	5
68304.20*	1000 Gallon Aboveground Storage Tank	1000 3785.4	41" 1041.4	Hemi	15′ 11″ 4851.4	4′ 2 15/16″ 1293.8	16 1/4" 412.8	9′ 0″ 2743.2	1737 787.9	15	5

<sup>\*</sup> Drain \*\*No Drain

Federal, state or local regulations may contain specific applicable requirements for protective coatings and cathodic protection. The purchaser and installer are responsible for compliance with such federal, state, local and NFPA industry regulations, including, but not limited to, proper purging prior to putting into service. Coating (s) must be continuous, uninterrupted and must comply with local, state or national codes or regulations.

